

SC

Mast climbing work platform **Maxus SC5000**

The Maxus SC5000 is a robust workhorse of Scanclimber's mast climbing work platforms. With a load capacity of up to 11000 lbs and a climbing rate of 25 ft per minute, it is the perfect tool for any facade work which requires great capacity – whether for new construction or restoration.

The SC5000 takes workers, tools and building materials to the desired height at a single lift.

A rack and pinion driven mast climbing work platform saves time and money at work sites.



SCANCLIMBER®

Maxus SC5000

Versatile Work Platform

THE RACK AND PINION DRIVEN SC5000 mast climbing work platform is a mid-heavyweight lifting machine and a working platform – all in one package. It can handle extreme heights, climbing fast and reliably up to 1000 ft. It is well-suited for any facade work that requires a capacity from 3000 to 11000 lbs, whether for new construction or restoration.

THE SC5000'S 5'3" WIDE PLATFORM provides enough space for workers to perform their job in comfort. Starting from 13'4" a single mast Maxus can grow up to 55'5" in length. With two masts the platform length can be extended up to 133'2". It is possible to use this twin mast configuration as two separate machines if needed.

Multi-Use

THE MAXUS COMBINES low ownership costs with versatility, reliability and safety. It is the ideal access solution for a wide variety of trades: glazing, EIFS, painting, roofing, caulking, restoration, inspection, cleaning, maintenance, stucco and many others. We have often seen it used in masonry work too. Compact and highly adaptable, the SC5000 offers platform extensions to achieve a number of configurations that can accommodate various facades.

Technological Excellence

BUILDING FACADES are becoming more and more diverse and constrained, which has been challenging mast climber manufacturers. The Maxus' modular structure allows lots of different set-ups. There is also a wide variety of accessories available that enables the platform to be aligned with different architectural configurations and work site layouts.

High Speed Reduces Set-Up Time

WITH A CLIMBING RATE of 25 ft per minute, Scanclimber Maxus is not only fast to climb up, but it is also faster to set-up than most mast climbers. The reason is a very stable mast. It allows a maximum anchor space of 60' – which is almost double compared to respective rival products. All this contributes to greater labour efficiency, reduced set-up time and of course to a safer work environment.

Long Lifetime – More Profit


SCANCLIMBER HAS LONG-LASTING QUALITY built in to its mast climbing work platforms. It is in structures, raw materials, automated manufacturing processes and finishing. For example the mast sections are precision welded from high grade steel by robots and when ready they are finished with hot-dip galvanization.



MODULAR DESIGN of Scanclimber mast climbing work platforms makes the components interchangeable between different Scanclimber models. The platform is easy and quick to erect and assemble manually and transfer to a new location when necessary. One mast section weighs 180 lbs and the platform module around 290 lbs. The platform floor is made of ribbed aluminium sheet. Since the mast climber can be dismantled into modules, it is easy to store and requires little space.

Flexibility with Options

YOU CAN HAVE MAXUS with various useful options such as: squirming Snake platform, Bricklayers extensions, Lifting table LT500, swinging Lifting arm, Mast assembly crane arm and many others.

SQUIRMING SNAKE is a platform system which provides an access to almost any facade shape. Bricklayer's extension is a lowered platform in front of the main platform. Lifting table is used when loading heavy materials on the platform on the ground. Swinging lifting arm on the top of the mast helps to move heavy goods and materials on the platform. Mast assembly crane makes mast installation easier.

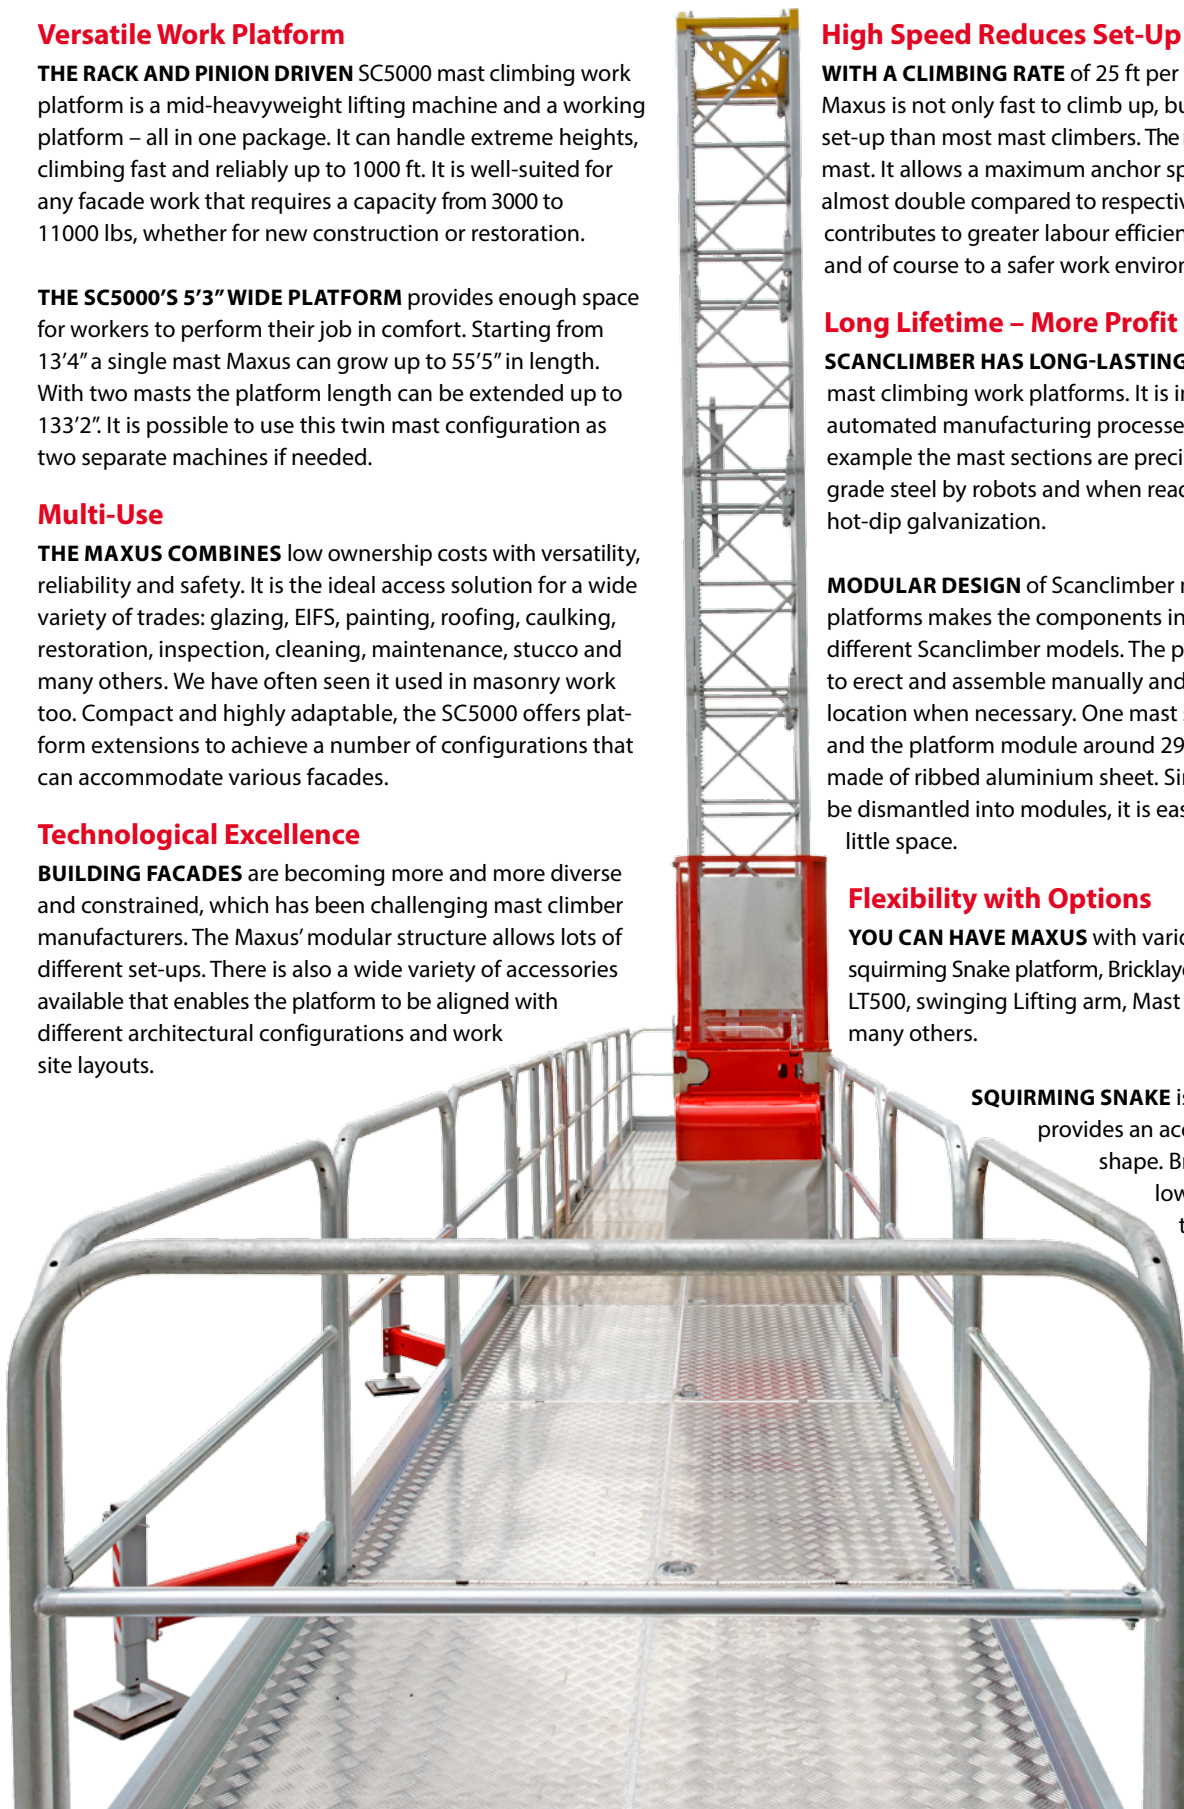

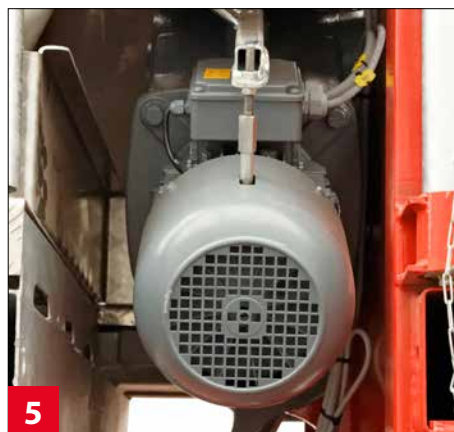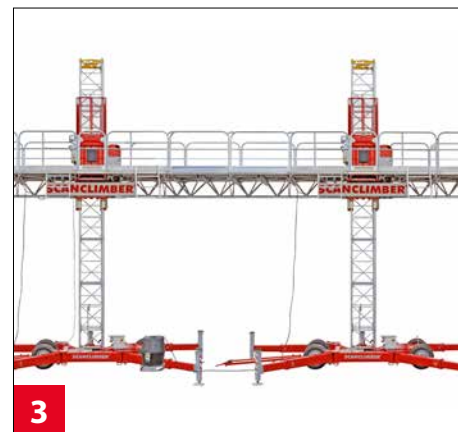

Details

Safety brake

1 A **MECHANICAL**, centrifugal safety brake is a standard feature on all Scanclimber mast climbing work platforms. It improves user safety, increases operational reliability and reduces the risk of breakdown. The safety brake is protected from dust and dirt.

Anchor

2 **THE MAST IS ANCHORED** to a wall with strong and durable anchors. The standard anchor type for the SC5000 is tube-type fixed with couplers which allows a maximum anchor spacing of 41 ft. It is easy to install with regular tools and fits in various configurations. If longer anchor spaces are needed, the Scanclimber's Maxianchor can be used. Maxianchor is even stronger than the standard anchor and it allows an anchor spacing of up to 60'.

Automatic Leveling System

3 A **TWIN VERSION MAXUS** comes with an automatic leveling system. The highly reliable system controls the platform drive precisely and ensures that the platform is always horizontally leveled.

Chassis

4 **SC5000** is available with a wheel chassis or mini-chassis. An SC5000 on a wheel chassis can be moved around a work site with its own electric motor, or it can also be towed using a towing bar. The wheel chassis has swivelling telescopic outriggers that can be adjusted in several positions to support the mast climbing work platform.

Emergency Lowering System


5 **THE MAXUS PLATFORM** can be manually operated, without power, and lowered to the ground. This feature is incorporated to provide a means of returning the platform in the event of a power failure.

Extensions

6 **WITH ADJUSTABLE** extensions the platform width can be steplessly extended up to 20 ft. The extensions are available in four sizes: 8'6"-19'8", 0-8'2", 0-5'10", and a bricklayer's extension. With these extensions you can also work behind or around corners.

Mast

THE MAST SECTION is completely hot-dip galvanized. Its height is 4'1" and it weighs 180 lbs. The mast, assembled from sections, is supported on the wall at maximum intervals of 60'.

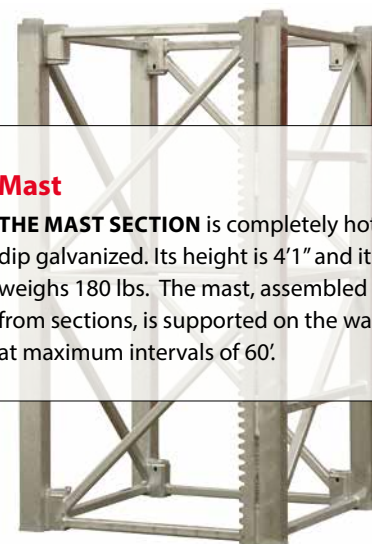

Technical Data

| | Single mast SC5000 | Twin mast SC5000 |
|--|--|---|
| Maximum platform length / loading capacity | 13'4" / 6000 lbs 23'10" / 5000 lbs 34'4" / 4100 lbs 44'11" / 3300 lbs 55'5" / 2200 lbs | 41'4" / 11000 lbs 67'7" / 8800 lbs 93'10" / 6600 lbs 114'10" / 4800 lbs 133'2" / 3300 lbs |
| Maximum freestanding height | | |
| - with extended outriggers on both sides | 60'-65" | 65' |
| - with extended outriggers on one side | 42'-60" | 42'-65" |
| Maximum height with top anchor | 82' | 82' |
| Maximum height with mast anchored | 330' (higher mast by request) | 330' (higher mast by request) |
| Distance between anchors | 60' | 60' |
| Lifting speed | 25' / min | 25' / min |
| Mast section, hot-dip galvanized | 4'1" / 180 lbs | 4'1" / 180 lbs |
| Electric system | | |
| - lifting motors | 2x208 V/60 Hz/3 kW, 3 Phase/30 A | 4x208 V/60 Hz/3 kW, 3 Phase/30 A |
| Safety devices | | |
| - overspeed safety brake | ◆ | ◆ |
| - emergency stop and limit switches | ◆ | ◆ |
| - electromagnetic brake | ◆ | ◆ |
| - phase sequence relay | ◆ | ◆ |
| - residual current device | ◆ | ◆ |

* depending on the platform length



Scanclimber is the world's technology leader in mast climbing equipment for installations. The company has its corporate head office in Pirkkala, Finland, and manufacturing in Gniezno, Poland. The company employs more than 200 people worldwide. Scanclimber creates value for its customers with high quality, reliable and flexible vertical access solutions.

SCANCLIMBER®

Scanclimber Oy, Turkkirata 26, FI-33960 Pirkkala | www.scanclimber.com
Tel. +358 10 680 7000, Fax +358 10 680 7033

Authorized partner